



# RIM BlackBerry 7510 Disassembly

Written By: Laura Yanez



## INTRODUCTION

This guide will show how to disassemble the Blackberry.

---



### TOOLS:

- [T5 Torx Screwdriver](#) (1)
-

## Step 1 — RIM BlackBerry 7510



- Remove the back cover exposing the battery, and remove the battery.

## Step 2



- Remove the six screws with the screwdriver using the T-5 tip.



## Step 3




- Pry open back cover

## Step 4




- Lift off the back cover.

## Step 5

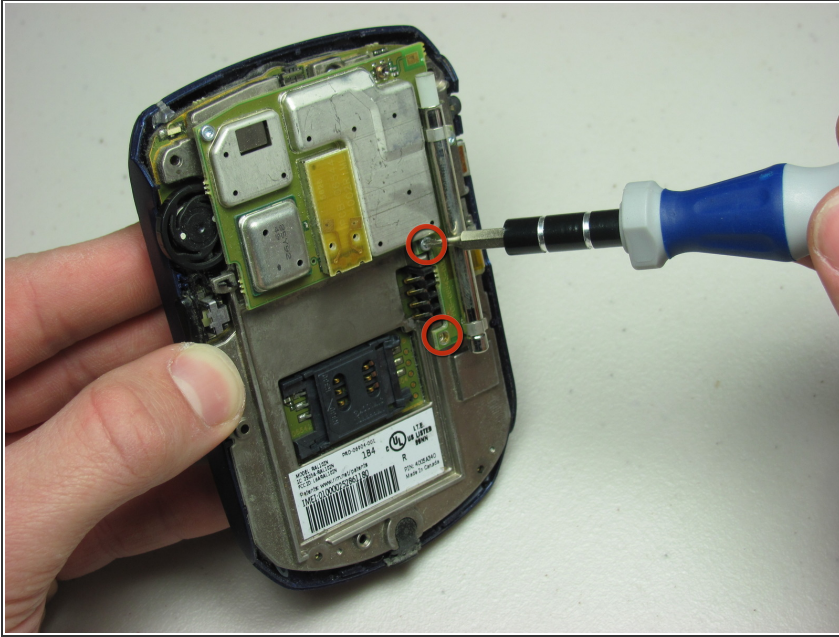

- Unscrew the two screws with a T-6 screwdriver head

## Step 6

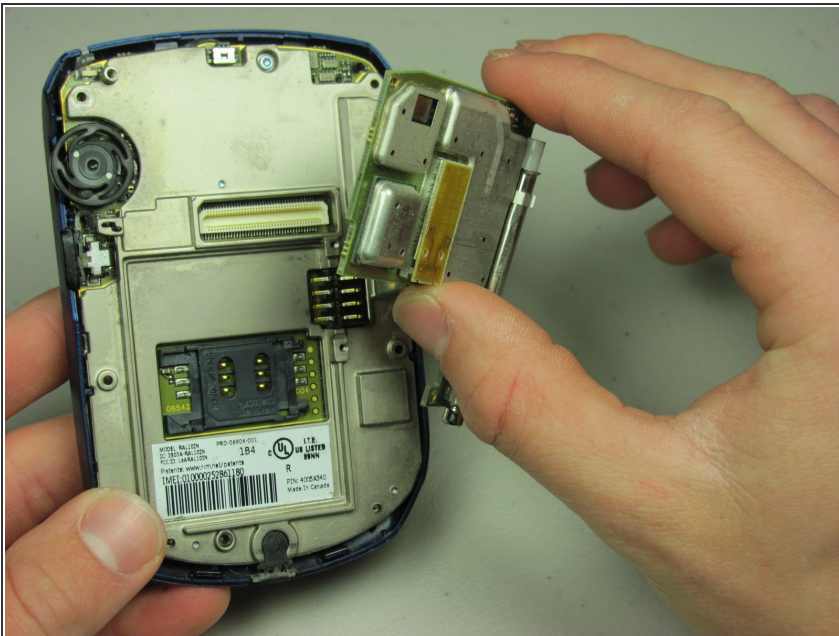

- Remove chip




## Step 7




- Unscrew to remove the back plate

## Step 8

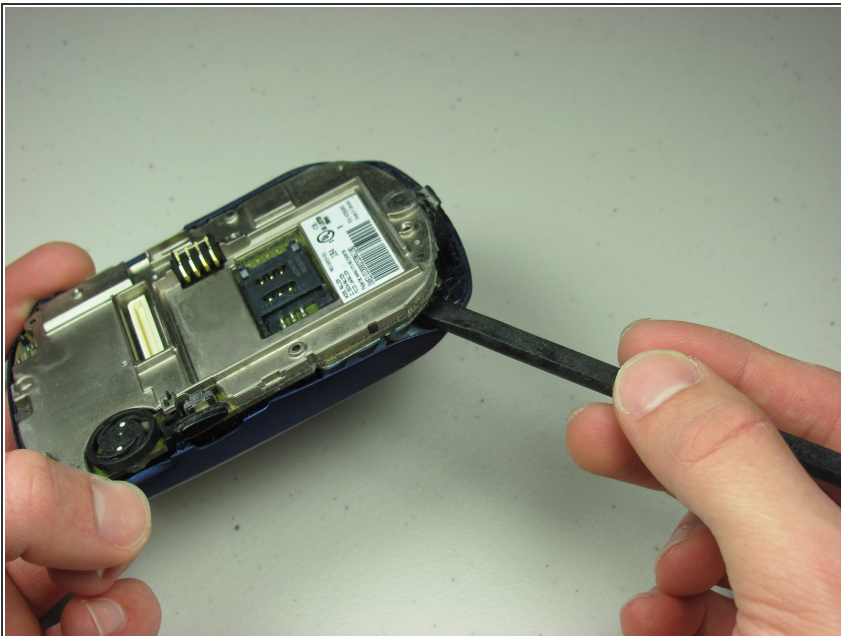

- Carefully pry off back plate

## Step 9

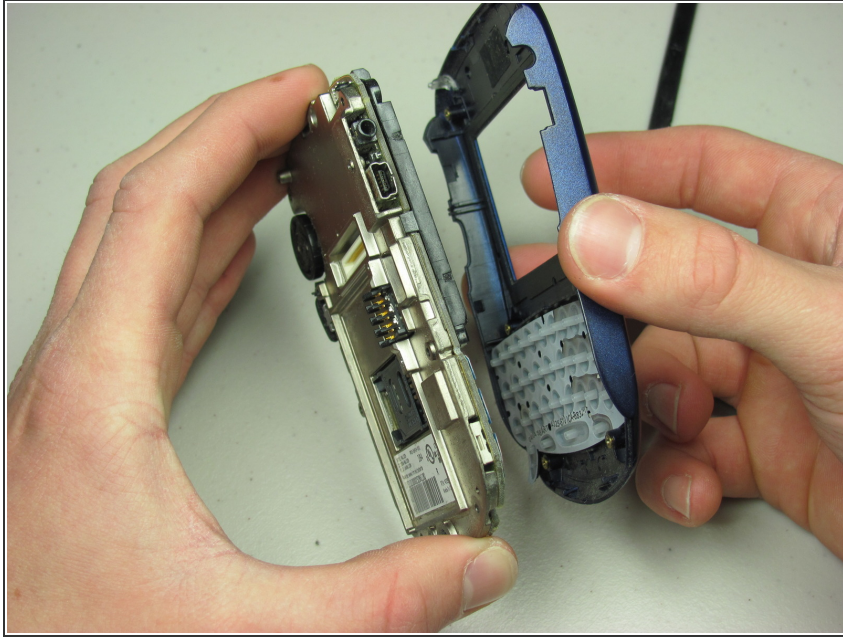

- Take off front cover and keypad

## Step 10



- Remove one screw in the front.




## Step 11



- Pry the two parts apart.


## Step 12

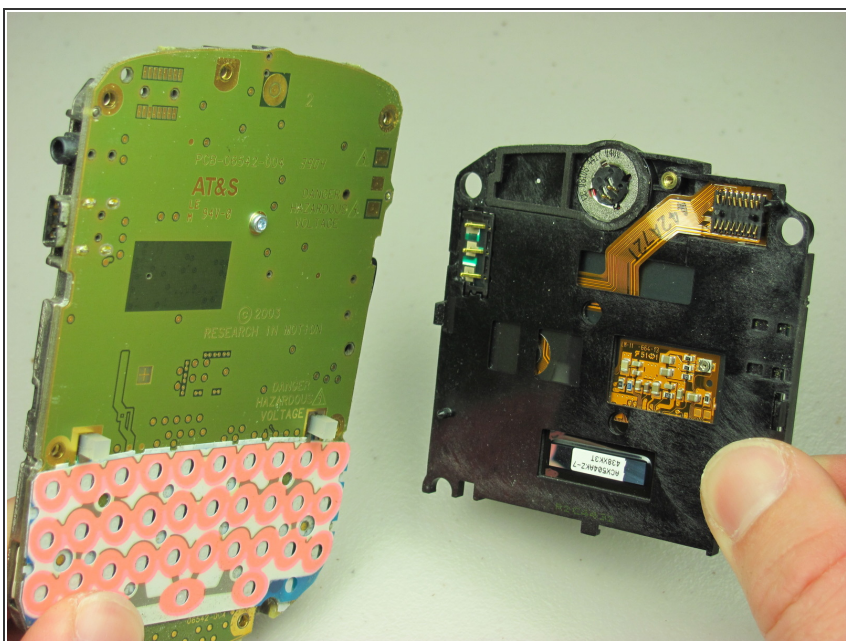

- The screen is now apart from the phone.




## Step 13

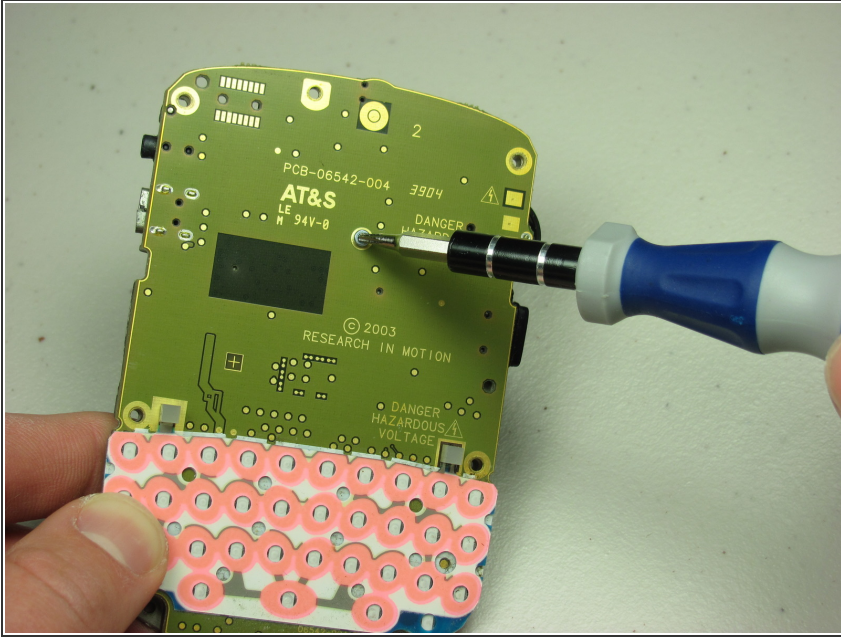


- Using the Philips screwdriver unscrew center screw.

## Step 14

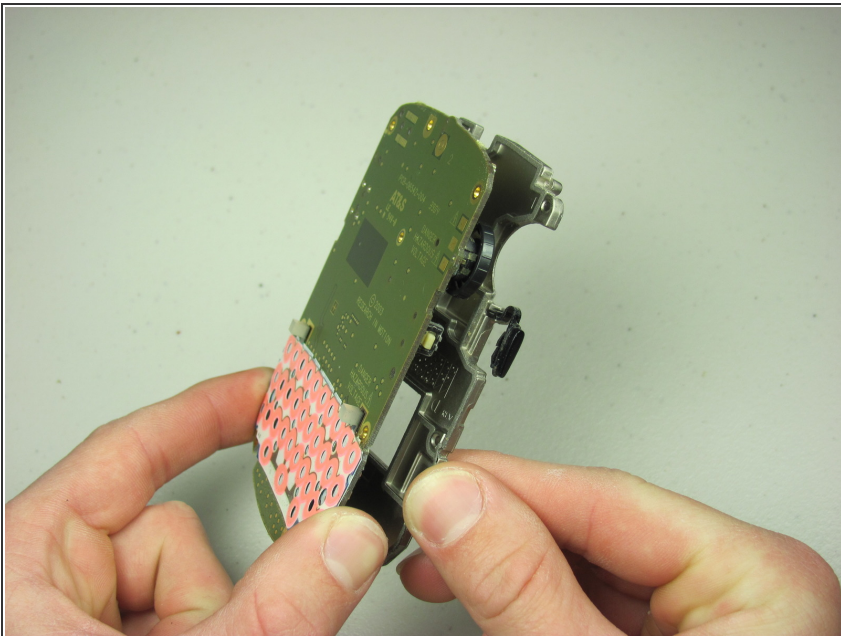


- The final two parts now come apart.

## Step 15

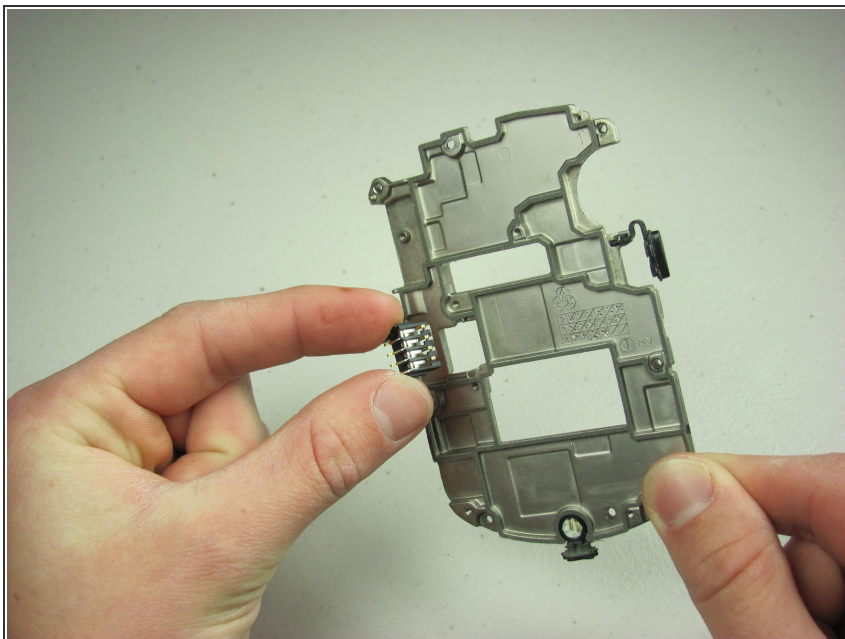

- The phone is now completely disassembled. Handle back with care shown piece comes right off.

## Step 16

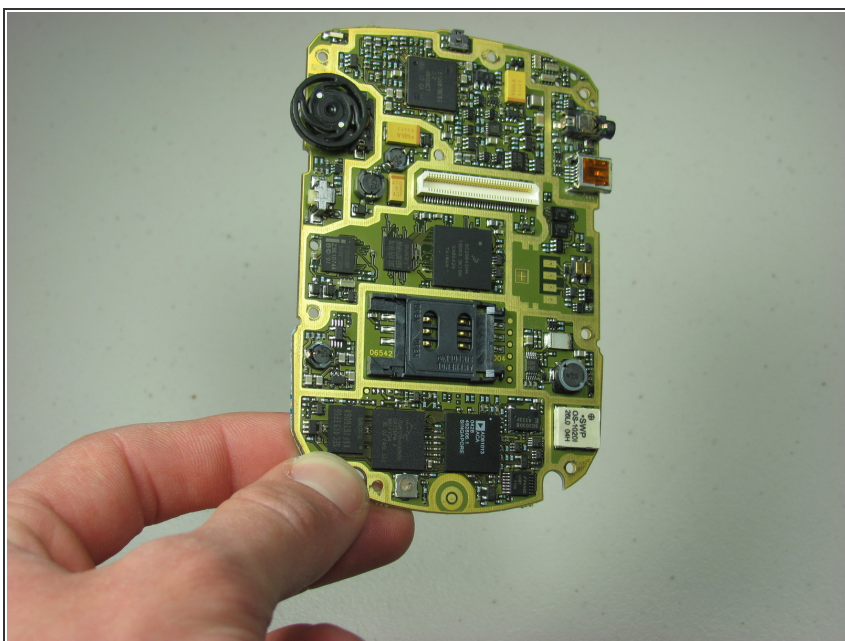

- Your blackberry has been fully disassembled.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-08 02:27:30 AM.